




LENMAR®

QUICKSTAIN® GLAZES

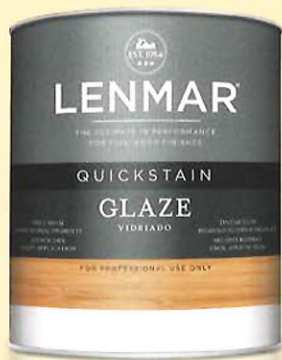

Ideal Uses:

- Edging
- Brush stroke
- Grain looks
- Padding
- Antiquing

Lenmar® QuickStain® Glazes are uniquely designed for the professional woodworker

OIL BASED GLAZES

1GZ.11xx Line


Lenmar oil-based glazes are formulated to allow the professional finisher wide latitude in visual techniques.

- Sand the sealer or topcoat before applying glaze.
- Apply by spray, brush or rag. Ten minute open time allows creation of any desired effect.
- Dry time varies on amount of glaze applied, usually 45 minutes to 2 hours.
- Should be topcoated the same day.

Many times, each application of a glaze is a unique use. We suggest testing each finish for color and adhesion on sample wood before beginning any production.

The series consists of four standard colors and a base (1GZ.1000) used for making unique colors (Tint using industrial colorants).

Colors available:

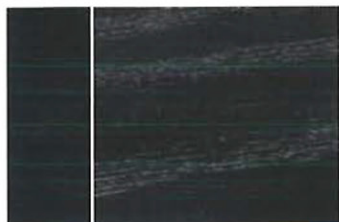

White

1GZ.1101

Formula (Qt.):

TW 3Y3



Black

1GZ.1102

Formula (Qt.):

LB 6Y12



Warm Brown

1GZ.1103

Formula (Qt.):

BU 5Y8



Cool Brown

1GZ.1104

Formula (Qt.):

BU 47


YO 12

LB 7



LENMAR®

QUICKSTAIN® GLAZES

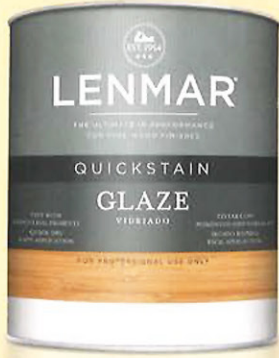

Ideal Uses:

- Faux grain effect
- Augmenting grain pore
- Accenting distress marks
- Antiquing

BREAKAWAY GLAZE BASE

1GZ.1200

Lenmar® Breakaway Glaze Base is formulated to be tinted with standard industrial colorants. It creates an opportunity for a different approach to glazing. Designed to be applied by spray only, it dries quickly (within 10 minutes), can be removed with Scotch-Brite pads to achieve various visual effects, and can be topcoated immediately after removal.


Nine formulations for standard colors are given below; however other colors can be created from this base (Tint using industrial colorants).

BREAKAWAY GLAZE FORMULAS

Raw Sienna (Qt.)	Mahogany (Qt.)	Raw Umber (Qt.)	Cordovan (Qt.)
YO 1Y4	QR 31	YO 30	QR 28
RO 1	LB 29	BU 6	LB 8
BU 7	Lamp Black (Qt.)	LB 24	MY 23
Off-white (Qt.)	LB 1Y12	Burnt Sienna(Qt.)	Van Dyke Brown(Qt.)
TW 1Y12	Burnt Umber (Qt.)	RO 32	BU 40
	BU 1Y12	QR 16	LB 19
		LB 11	



Raw Sienna



Off-white



Mahogany



Lamp Black



Burnt Umber



Cordovan



Burnt Sienna



Van Dyke Brown



Raw Umber

NOTATION FOR COLORANTS:
 nYxx = n = number of ounces
 xx = number of increments(48ths)

Example: 1Y12 = 1 ounce + 12 increments
 Note: To use the formulas above in the 1GZ.1000 glaze base, double the colorant amounts.



Lenmar® is Manufactured and Distributed by Gemini Industries
 See all the Lenmar® Wood Finishing and Prep Products at: www.lenmar-coatings.com

Lenmar Customer Service Line: 877-299-3600 or via fax: 405-262-9310



LENMAR®